


PERFO

Interlocking Ground Reinforcement Tiles

Technical Specifications

Material:	PE / PP	
Colour:	Black	
Closed surface area (load bearing):	75%	
Surface texture:	raised points for grip	
Load bearing capability:	up to 40 tonnes/m ² *	
	* depending on ground conditions and preparation	
Dimensions (individual tile):	200 x 200 x 37 mm**	
	**not including connecting lugs	
Weight per tile:	225 g	
Mat size:	A	B
Dimensions as supplied (made-up section):	121 x 81 cm 6 x 4 Perfo tiles	121 x 121 cm 6 x 6 Perfo tiles
Weight per made-up section:	5.5 kg	8.1 kg
No. of sections per pallet:	55	55
Total surface area per pallet:	Approx. 54 m ²	Approx. 81 m ²
Weight per pallet:	approx. 320 kg	approx. 460 kg
Height per pallet:	approx. 220 cm	approx. 220 cm
Resistant to oil, solvents, salt water, most acids.		
UV and frost resistant		
Does not rot		

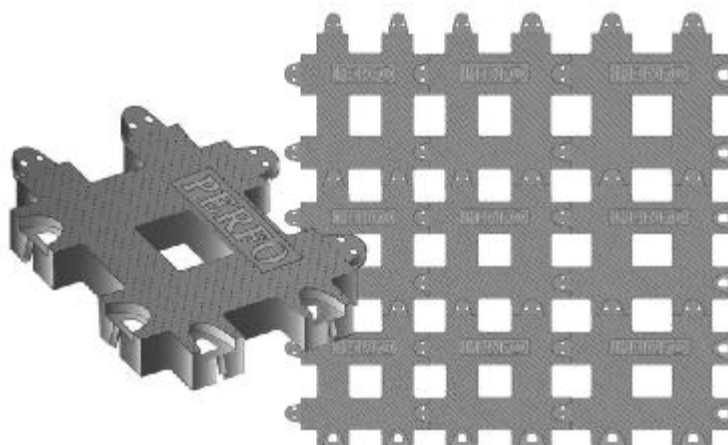

PERFO-UK

A division of Source2Trade Ltd.
Jan 2002